


































































 Acetic Silicone sealant - "DIY range", CE certified	 Silicones acétiques - Gamme "Bricolage"  Acetat Silikon - "Heimwerker-Sortiment"  Selladores de silicona acéticos - Linea "hazlo tú mismo"  Стандартный ацетатный силикон - "Бытовая Линейка"	<b>372</b>
	 High Temperature sealant "Professional range", CE certified	 Mastic réfractaire - Gamme "Professionnelle"  Hochtemperatur-Silikon - "Profi-Sortiment"  Sellador refractario - Linea "Profesional"  Огнестойкий герметик - "Профессиональная Линейка"	<b>373</b>
	 Neutral silicone sealant for metalworks/roofings, CE certified	 Mastic silicone neutre - Gamme "Professionnelle"  Neutral Silicon-Dichtstoff - "Profi-Sortiment"  Selladores de silicona neutros - Linea "Profesional"  Нейтральные силиконы - "Профессиональная Линейка"	<b>374</b>
	 Neutral silicone sealant for windows/façades, CE certified	 Mastic silicone neutre - Gamme "Professionnelle"  Neutral Silicon-Dichtstoff - "Profi-Sortiment"  Selladores de silicona neutros - Linea "Profesional"  Нейтральные силиконы - "Профессиональная Линейка"	<b>375</b>
	 Acrylic sealant CE certified	 Mastic acrylique - Gamme "Professionnelle"  Acryl-Dichtstoff - "Profi-Sortiment"  Selladores acrílicos - Linea "Profesional"  Акриловые герметики - "Профессиональная Линейка"	<b>376</b>
	 Hybrid polymers adhesive/sealant	 Colle-mastic à base de polymères HYBRIDES - Gamme "Professionnelle"  Hybrid-Polymer Kleb/Dichtstoff - "Profi-Sortiment"  Adhesivo-Sellador de polimeros híbridos - Linea "Profesional"  Гибридный клей-герметик - "Профессиональная Линейка"	<b>377</b>
	 Hybrid polymers High Strength adhesive	 Colle à base de polymères hybrides, très bonne adhérence - Gamme "Professionnelle"  Hybrid-Polymer Klebstoff, sehr hohe Anfangshaftung - "Profi-Sortiment"  Adhesivo alta adherencia a base de polimeros híbridos, EFECTO VENTO-SA - Linea "Profesional"  Гибридный клей с высокоточным соединением, ЭФФЕКТ ПРИСОСКИ - "Профессиональная Линейка"	<b>377</b>
	 Professional caulking guns	 Pistolets professionnelles  Professionelle Handpistolen  Pistolas profesionales  Профессиональные пистолеты	<b>378</b>
	 Nozzles and Extensions for cartridges	 Canules et rallonges pour cartouches  Düsen und Verlängerungen für Kartuschen  Boquillas y prolongas para cartuchos  Насадки и удлинители для флаконов	<b>379</b>
	 Polyurethane foam	 Mousse polyuréthane  Polyurethanschäum  Espumas de poliuretano  Полиуретановая пена	<b>381</b>
	 Professional gun for polyurethane foam	 Pistolet professionnel pour mousse polyuréthane  Professionelle Handpistole für Polyurethanschäum  Pistola para espumas de poliuretano  Пистолет под пену	<b>383</b>

## Sealants, Adhesives and Foams

 Mastics, Adhésives et Mousses


 Dichtstoffe, Klebstoffe und Schäume

 Selladores, Adhesivos y Espumas

 Герметики, клей и Пены



## 🇬🇧 Multipurpose acetic silicone sealant, with nozzle

- 🇫🇷 Silicone acétique universel, avec canule
- 🇩🇪 Universal- Acetat Silikon, mit Düse
- 🇪🇸 Sellador de silicona acético universal, con boquilla
- 🇷🇺 Стандартный ацетатный силикон с насадкой



Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
in cartridge				
CE VLU 00 00 280	Transparent	280	20	1.500
CE VLU 01 00 280	White	280	20	1.500


CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE

Description	Usage	Advantages
<p>One component, acetic curing, elastic silicone sealant (CE Certified F-EXT-INT 12,5E), 280 ml content with standard nozzle.</p> <p><b>- STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +150°C</p> <p><b>- SKIN TIME:</b> 20 minutes</p> <p><b>- CURING RATE:</b> 3 mm/24 h</p>	<p>For general use, VLU sealant is suitable for general sealing on various surfaces:</p> <ul style="list-style-type: none"> <li>• Glass</li> <li>• Anodized aluminium</li> <li>• Ceramic tiles</li> <li>• Wood</li> <li>• Compact and non-porous materials in general</li> </ul> <p>• NOT to be painted</p> <p>• NOT suitable for PP, PE, PTFE, painted aluminium, metals and further corrosion sensitive surfaces, natural stones (marble, granite, quartzite, ...)</p> <p>• NOT to be used in high humidity sites</p> <p>• NOT to be used for food grade applications</p> <p>• NOT to be used for mirror installations</p>	<ul style="list-style-type: none"> <li>• CE Certified EN 15651-1:2012 F-EXT-INT 12,5E</li> <li>• Moderate deformation capability</li> <li>• UV resistant</li> <li>• Suitable for internal/external applications</li> </ul> <p><b>Technical details in DOP. N. TECFVLU19-001</b></p>  

# VM



## 🇬🇧 Sanitary (mold-retardant) acetic silicone sealant for “DIY applications”, with nozzle

- 🇫🇷 Silicone sanitaire acétique pour “usages bricolage” avec protection à la moisissure, avec canule
- 🇩🇪 Acetat Sanitärsilikon mit Schimmelschutz, für “Heimwerker- Anwendungen”, mit Düse
- 🇪🇸 Sellador de silicona acético para sanitarios, linea “hazlo tú mismo”, con boquilla
- 🇷🇺 Силикон (плесень ингибитор) для сантехнических зон для бытового применения с насадкой




Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
in cartridge				
CE VM 00 00 280	Transparent	280	24	1.680
CE VM 01 00 280	White	280	24	1.680

CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE

Description	Usage	Advantages
<p>One component, acetic curing, elastic silicone sealant (CE Certified F-EXT-INT-CC 25LM and XS1), with special mould retardant additive, 280 ml content with standard nozzle.</p> <p><b>- STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +100°C</p> <p><b>- SKIN TIME:</b> 15-30 minutes</p> <p><b>- CURING RATE:</b> 2 mm/24 h</p>	<p>For General use in sanitary joints, VM sealant is suitable for sealing on:</p> <ul style="list-style-type: none"> <li>• Plumbing fixtures</li> <li>• Ceramic tiles</li> <li>• Glass</li> <li>• Compact and non-porous materials</li> <li>• Wood</li> </ul> <p>• NOT to be painted</p> <p>• NOT suitable for PP, PE, PTFE, painted aluminium, metals and further corrosion sensitive surfaces, natural stones (marble, granite, quartzite, ...)</p> <p>• NOT to be used for food grade applications</p> <p>• NOT to be used for mirror installations</p>	<ul style="list-style-type: none"> <li>• CE Certified EN 15651-1:2012 F-EXT-INT-CC 25LM</li> <li>• CE Certified EN 15651-3:2012 XS1</li> <li>• Mould retardant</li> <li>• High elasticity</li> <li>• UV resistant</li> <li>• Suitable for internal/external applications</li> <li>• Idoneo per applicazioni interne/esterne</li> </ul> <p><b>Technical details in DOP. N. 106138/13-I-III</b></p>  

## PROFESSIONAL high temperature acetic silicone sealant, with nozzle

- 🇫🇷 Mastic silicone acétique PROFESSIONNEL pour hautes températures, avec canule
- 🇩🇪 PROFI- Acetat-Hochtemperatur-Silikon, mit Düse
- 🇪🇸 Sellador de silicona acético para ALTAS TEMPERATURAS, linea PROFESIONAL, con boquilla
- 🇷🇺 Профессиональный силиконовый высокотемпературный герметик, с насадкой



Item code	Colour	Temperature service / peak	Contents ml	Pcs. per carton	Pcs. per pallet
in cartridge					
VU 04 00 300	Black	270° C / 350° C	300	12	840
VU 15 00 300	Red	250° C / 350° C	300	12	840

Description	Usage	Advantages
<p>One component, HIGH TEMPERATURE, PROFESSIONAL acetic curing, elastic silicone sealant, 300 ml content with standard nozzle.</p> <p>- <b>STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p>- <b>INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p>- <b>SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +250°C (300 °C for short time)</p> <p>- <b>SKIN TIME :</b> 15 minutes</p> <p>- <b>CURING TIME:</b> &gt; 3 mm/24 h</p>	<p>PROFESSIONAL usages. IDEAL for sealings and joints for:</p> <ul style="list-style-type: none"> <li>• Ovens</li> <li>• Boilers</li> <li>• Heating systems</li> <li>• Flue pipes</li> <li>• Piping</li> <li>• Engines</li> <li>• Suitable also for gasket replacement of household appliances and engines.</li> <li>• NOT to be painted</li> <li>• NOT suitable for PP, PE, PTFE, painted aluminium, metals and further corrosion sensitive surfaces, natural stones (marble, granite, quartzite, ...)</li> <li>• NOT to be used in high humidity sites</li> <li>• NOT to be used for food grade applications</li> <li>• NOT to be used for mirror installations</li> </ul>	<ul style="list-style-type: none"> <li>• High thermal resistance</li> <li>• High elasticity</li> <li>• High adesion</li> <li>• UV resistant</li> <li>• Suitable for internal/external applications</li> </ul>



## 🇬🇧 Multipurpose neutral curing silicone sealant, Methylethylketoxime Free (NO MEKO), with nozzle

- 🇫🇷 Mastic silicone polyvalent à durcissement neutre, sans methyl ethyl ketoxime (Sans MEKO), avec buse
- 🇩🇪 Neutral vernetzender Mehrzweck-Silikondichtstoff, frei von Methylethylketoxim (NO MEKO), mit Düse
- 🇪🇸 Sellador de silicona neutro universal, sin Metiletilcetoxima (NO MEKO), con boquilla
- 🇷🇺 Многофункциональный нейтральный отверждающий силиконовый герметик, без метилэтилтоксима (нет Meko), с насадкой



Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
in cartridge				
CE VRU 00 00 310	Transparent	310	20	1.500

CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE

Description	Usage	Advantages
<p>One component, PROFESSIONAL neutral curing, elastic silicone sealant, MEKO FREE (CE Certified F-EXT-INT-CC 20LM, G-CC 20LM), Universal, 280 ml content with standard nozzle.</p> <p><b>- STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +150°C</p> <p><b>- SKIN TIME:</b> max 7 minutes</p> <p><b>- CURING RATE:</b> 2 mm/24h</p>	<p>For indoor and outdoor applicationa (High UV resistance), fast curing, suitable for horizontal and vertical sealing of corrosion-sensitive material for windows sealing, glazing, box for roller shutter and general construction sealings.</p> <p><u>Good adhesion on:</u></p> <ul style="list-style-type: none"> <li>Aluminium</li> <li>Metals</li> <li>Wood</li> <li>PVC</li> <li>Glass</li> <li>Ceramic</li> <li>Fibreglass</li> </ul> <p>• Also adhere on porous substrate like concrete, plaster, masonry.</p> <ul style="list-style-type: none"> <li>NOT to be painted</li> <li>NOT suitable for PP, PE, PTFE</li> <li>NOT to be used in high humidity sites</li> <li>NOT to be used for food grade applications</li> <li>NOT to be used for mirror installations</li> </ul>	<ul style="list-style-type: none"> <li>CE Certified EN14561-1:2012F-EXT-INT-CC 20LM</li> <li>CE Certified EN14561-2:2012G-CC 20LM</li> <li>Low modulus, high deformation capability</li> <li>Maximum allowed movement: 20%</li> <li>Maximum width of the joint: 12 mm</li> <li>MEKO FREE</li> <li>Low risk for the health</li> <li>Free sales to everybody and not limited to professional users only.</li> </ul> <p><b>Technical details in DOP. N. TECFVRU20-001</b></p>  

# VR

## 🇬🇧 PROFESSIONAL low modulus neutral silicone sealant for metalworks/roofings, with nozzle



- 🇫🇷 Mastic silicone neutre PROFESSIONNEL bas module pour construction métalliques/couvertures, avec canule
- 🇩🇪 PROFI-neutral niedrigmoduliger Silikon-Dichtstoff für Metallbau- und Dachkonstruktionen, mit Düse
- 🇪🇸 Sellador de silicona neutro de bajo módulo para canalones, cubiertas y construcción, linea PROFESIONAL, con boquilla
- 🇷🇺 Профессиональный нейтральный низкомолекулярный силикон герметик для металлоконструкций и кровля, с насадкой



▲ All RAL colours are intended to be "RAL-like"

Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
In cartridge				
New Item CE VR 01 00 300	Grey white (similar to RAL 9002)	300	24	1.440
CE VR 03 00 300	Grey (similar to RAL 7004)	300	24	1.440
CE VR 05 00 300	Chocolate brown (similar to RAL 8017-8019)	300	24	1.440
New Item CE VR 07 00 300	Oxide red (similar to RAL 3009)	300	24	1.440
New Item CE VR 08 00 300	Brick red (similar to RAL 8004)	300	24	1.440

CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE

Description	Usage	Advantages
<p>One component, PROFESSIONAL neutral curing, elastic silicone sealant, MEKO FREE (CE Certified F-EXT-INT-CC 25LM, PW-EXT-INT-CC 25LM), Special, high viscosity formulation for tinsmith works, roofing and building applications, 300 ml content with standard nozzle.</p> <p><b>- STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +160°C</p> <p><b>- SKIN TIME:</b> 25 minutes</p> <p><b>- CURING RATE:</b> 3 mm/24 h</p>	<p>For professional use CE Certified for indoor and outdoor applicationa (High UV resistance). Outstanding adhesion on:</p> <ul style="list-style-type: none"> <li>Pregalvanized and prepainted steel</li> <li>Copper</li> <li>Stainless Steel</li> <li>Aluminium</li> <li>Polycarbonate, fiberglass, glass, mirror and porous surfaces</li> <li>Properly designed for the sealing of tinsmith works (roofing, flashing, rain gutter, downspout, etc...) and general metalworks</li> <li>Aluminium, wood and PVC window-frames.</li> </ul> <p>• Also adhere on porous substrate like concrete, plaster, masonry</p> <ul style="list-style-type: none"> <li>NOT to be painted</li> <li>NOT suitable for PP, PE, PTFE</li> <li>NOT to be used for food grade application</li> </ul>	<ul style="list-style-type: none"> <li>CE Certified EN14561-1:2012F-EXT-INT-CC 25LM</li> <li>CE Certified EN14561-2:2012G-CC 25LM</li> <li>CE Certified EN14561-4:2012 PW-EXT-INT-CC 25LM</li> <li>Maximum versatility</li> <li>Low modulus, high deformation capability</li> <li>Maximum allowed movement: 25%</li> <li>Maximum width of the joint: 25 mm</li> <li>MEKO FREE</li> <li>Low risk for the health</li> <li>Free sales to everybody and not limited to professional users only</li> </ul> <p><b>Technical details in DOP. N. TECFVR23-001</b></p>  

# VRF

## PROFESSIONAL neutral silicone sealant for windows and façades, with nozzle

- Mastic silicone neutre PROFESSIONNEL pour fenêtres et façades, avec canule
- PROFI-neutral Silikon-Dichtstoff für Fenster und Fassaden, mit Düse
- Sellador de silicona neutro para marcos/ventanas/fachadas, linea PROFESIONAL, con boquilla
- Профессиональный нейтральный силикон для деревянных оконных рам и фасады, с насадкой



Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
<b>In cartridge</b>				
CE VRF 00 00 300	Transparent	300	24	1.440
CE VRF 01 00 300	White (similar to RAL 9010)	300	24	864
CE VRF 02 00 300	Ivory (similar to RAL 1013)	300	24	864
CE VRF 03 00 300	Grey (similar to RAL 7004)	300	24	864
CE VRF 04 00 300	Black (similar to RAL 9005)	300	24	864
CE VRF 05 00 300	Chocolate Brown (similar to RAL 8017)	300	24	864
CE VRF 11 00 300	Nut Brown (similar to RAL 8007)	300	24	864
CE VRF 13 00 300	Aluminum Grey (similar to RAL 9006)	300	24	864

CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE



▲ All RAL colours are intended to be "RAL-like"

Description	Usage	Advantages
<p>One component, PROFESSIONAL neutral curing, elastic silicone sealant, MEKO FREE (CE Certified F-EXT-INT-CC 25LM, G-CC 25LM SxS1, PW-EXT-INT-CC 12,5 E), Special, fast curing formulation for windows and frames (also suitable for roofing) and building applications, 300 ml content with standard nozzle.</p> <p>- <b>STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p>- <b>INSTALLATION TEMPERATURE:</b> (temperatura del materiale di base) 5°C ÷ 40°C</p> <p>- <b>SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +150°C</p> <p>- <b>SKIN TIME:</b> 35 minutes</p> <p>- <b>CURING RATE:</b> &gt; 3 mm/24 h</p>	<p>For professional use for indoor and outdoor applications (High UV resistance), fast curing, outstanding adhesion on:</p> <ul style="list-style-type: none"> <li>Aluminium</li> <li>Metals</li> <li>Wood</li> <li>PVC</li> <li>Glass</li> <li>Ceramic</li> <li>Fibreglass</li> </ul> <p>• Properly designed for the perimetral sealing of windows, frames, and general construction sealings</p> <p>• Also suitable for roofing application</p> <ul style="list-style-type: none"> <li>NOT to be painted</li> <li>NOT suitable for PP, PE, PTFE</li> <li>NOT to be used for food grade applications</li> </ul>	<ul style="list-style-type: none"> <li>CE Certified EN14561-1:2012F-EXT-INT-CC 25LM</li> <li>CE Certified EN14561-2:2012G-CC 25LM</li> <li>CE Certified EN14561-3:2012 S XS1</li> <li>CE Certified EN14561-4:2012 PW-EXT-INT-CC 12,5E</li> <li>Low modulus, high deformation capability</li> <li>Maximum allowed movement: 25%</li> <li>Maximum width of the joint: 25 mm</li> <li>MEKO FREE</li> <li>Low risk for the health</li> <li>Free sales to everybody and not limited to professional users only</li> </ul> <p><b>Technical details in DOP. N. TECFVRF23-001</b></p> <div style="display: flex; align-items: center;"> <div> <p>DoP</p> </div> </div>

# VPP - VPPS

## PROFESSIONAL acrylic sealant for constructions (INDOOR/OUTDOOR usages), with nozzle

- Mastic acrylique PROFESSIONNEL pour la construction (usages INTERIEUR/EXTERIEUR), avec canule
- PROFI-Acryl-Dichtstoff für Bauwerke (Anwendungen im INNEN-/AUSSENBEREICH), mit Düse
- Sellador acrílico para uso interior/exterior en construcción, línea PROFESIONAL, con boquilla
- Профессиональный акриловый герметик для строительства (для внутреннего и наружного применения), с насадкой



VPP - 300 ml cartridge




VPPS - 600 ml foil bag



WHITE GREY

Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
<b>In cartridge</b>				
CE VPP 01 00 300	White	300	24	1.680
CE VPP 03 00 300	Grey	300	24	1.680
<b>In foil bag</b>				
* CE VPPS 01 00 600	White	600	20	1.200
* CE VPPS 03 00 600	Grey	600	20	1.200

CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE  
 \* Available on request (quantity and lead time to be agreed) / Disponible sur demande (quantité et délai de livraison à concorder) / Verfügbar auf Anfrage (Menge und Liefertermin zu vereinbaren) / Disponible bajo solicitud (cantidad y tiempos de entrega a concorder) / На заказ (количество и срок поставки по соглашению)

Description	Usage	Advantages
<p>Acrylic Elasto-plastic sealant for INDOOR AND OUTDOOR Applications, for PROFESSIONAL USE (CE Certified F12,5P)</p> <p>Available in:                      VPP - 300 ml cartridge with standard nozzle                      VPPS - 600 ml Aluminium foil bag.</p> <p><b>- STORAGE:</b>                      5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b>                      (temperature of the base material)                      2°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b>                      (ambient temperature after full curing)                      -20°C ÷ +80°C</p> <p><b>- SKIN TIME:</b> 15 minutes</p> <p><b>- CURING RATE:</b> 2 mm/24 h</p>	<p>For professional use (Also conform to ISO 11600-F 12,5P) for indoor and outdoor application, good adhesion on:</p> <ul style="list-style-type: none"> <li>• Concrete</li> <li>• Gypsum</li> <li>• Masonry</li> <li>• Wood</li> </ul> <p>• Also adhere on aluminium and on some plastics (Except PE, PP, PTFE)</p> <p>• Suitable for sealing of precast concrete panels and windows</p> <p>• NOT suitable for PP, PE, PTFE</p> <p>• NOT suitable for permanent wet application.</p> <p>• NOT to be used for food grade applications</p> <p>• NOT to be used on glass and mirrors</p>	<ul style="list-style-type: none"> <li>• CE Certified EN 1561-1:2012 F-EXT-INT 12,5P</li> <li>• Maximum allowed movement: 12,5%</li> <li>• Maximum width of the joint: 30 mm</li> <li>• Paintable (compatibility tests recommended) after dry</li> </ul> <p><b>Technical details in DOP. N. VPP14001</b></p> 

# VQ

## PROFESSIONAL rough finish acrylic sealant (indoor/outdoor usage), with nozzle


- Mastic acrylique PROFESSIONNEL pour réparations de fissures (usages INTERIEUR/EXTERIEUR), avec canule
- Profi Putzacryl Dichtstoff (Anwendung im INNEN-/AUSSENBEREICH), mit Düse
- Sellador acrílico efecto de yeso para uso interior/exterior en construcción, línea PROFESIONAL, con boquilla
- Профессиональный акрилатный герметик для заделки трещин и ремонта (для внутреннего и наружного применения), с насадкой



WHITE

Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
<b>In cartridge</b>				
CE VQ 01 00 300	White	300	24	1.680

CE Certified / Certifié CE / CE Zulassung / Certificado CE / Сертификат CE

Description	Usage	Advantages
<p>Acrylic Rough finish sealant PLASTER EFFECT, for PROFESSIONAL USE, 300 ml cartridge with standard nozzle.</p> <p><b>- STORAGE:</b>                      5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b>                      (temperature of the base material)                      2°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b>                      (ambient temperature after full curing)                      -20°C ÷ +80°C</p> <p><b>- SKIN TIME:</b> 15 minuti</p> <p><b>- CURING RATE:</b> 2 mm/24 h</p>	<p>For professional use, mimics the rough finish of plaster. Suitable for repairing and filling cracks in wall and plaster.</p> <p>Good adhesion on construction materials like:</p> <ul style="list-style-type: none"> <li>• Concrete</li> <li>• Mortar</li> <li>• Gypsum</li> <li>• Masonry</li> <li>• Wood</li> </ul> <p>• Also adhere on aluminium and on some plastics (Except PE, PP, PTFE)</p> <p>• NOT suitable for PP, PE, PTFE</p> <p>• NOT suitable for permanent wet application</p> <p>• NOT to be used for food grade applications</p> <p>• NOT to be used on glass and mirror</p>	<ul style="list-style-type: none"> <li>• Adhere on both fully dry and moist surface</li> <li>• For indoor and outdoor applications</li> <li>• Maximum width of the joint: 20 mm</li> <li>• Paintable after dry</li> <li>• Solvents free</li> </ul> <p><b>Technical details in DOP. N. VQ14001</b></p> 

# VX

## PROFESSIONAL SILANE-terminated HYBRID polymers based adhesive/sealant, with nozzle

Colle-mastic PROFESSIONNELLE à base de polymères HYBRIDES à terminaison silane, avec canule

Profi - Hybrid-Polymer Kleb- und Dichtstoff, mit Düse

Adhesivo-Sellador a base de polímeros híbridos, línea PROFESIONAL, con boquilla

Профессиональный гибридный клей-герметики на основе MS – Полимера, с насадкой



Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
In cartridge				
VX 01 00 290	White	290	12	840

WHITE

Description	Usage	Advantages
<p>Adhesive-Sealant with high elasticity SILANE-terminated HYBRID polymers based, for PROFESSIONAL USE, for a wide range of applications, paintable, neutral curing, for Indoor and Outdoor applications, 290 ml cartridge with standard nozzle.</p> <p><b>- STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +100°C</p> <p><b>- SKIN TIME:</b> 10-15 minutes</p> <p><b>- CURING RATE:</b> &gt; 3 mm/24 h</p>	<p>Good adhesion on:</p> <ul style="list-style-type: none"> <li>Metals (including cooper, brass, bronze)</li> <li>Anodized or non finished aluminium</li> <li>Hard plastic elements (except PP, PE, PTFE)</li> <li>Glass</li> <li>Mirrors</li> <li>Wood,</li> <li>Natural stones,</li> <li>Concrete,</li> <li>Building materials.</li> </ul> <p>Suitable for applications in water, can also be used in swimming pools, due to high resistance to Chlorine and acids</p> <p>Suitable also for FOOD GRADE applications (cold storage, smokebox, etc...)</p> <p>• NOT suitable for PP, PE, PTFE</p>	<ul style="list-style-type: none"> <li>Maximum width of the joint: 20 mm</li> <li>Immediately paintable (tests recommended)</li> <li>Environmentally friendly: free of solvent and isocyanate</li> </ul>

# VXV

## PROFESSIONAL High Strength SILANE-terminated HYBRID polymers based adhesive with High Initial Grab, with special nozzle

Colle PROFESSIONNELLE à base de polymères HYBRIDES à terminaison silane, très bonne adhérence et grande résistance, avec canule spéciale

Profi - Hybrid-Polymer Klebstoff, sehr hohe Anfangshaftung und Festigkeit, mit spezieller Düse

Adhesivo alta adherencia inicial efecto ventosa, a base de polímeros híbridos, línea PROFESIONAL, con boquilla especial

Профессиональный Гибридный клей с высокопрочным соединением, ЭФФЕКТ ПРИСОСКИ на основе MS – Полимера, с специальной насадкой







WHITE

Item code	Colour	Contents ml	Pcs. per carton	Pcs. per pallet
In cartridge				
VXV 01 00 290	White	290	12	840

Description	Usage	Advantages
<p>HIGH STRENGTH SILANE-terminated HYBRID polymers based adhesive with HIGH INITIAL GRAB, for PROFESSIONAL use, with a WIDE RANGE OF APPLICATIONS, 290 ml cartridge with standard nozzle.</p> <p><b>- STORAGE:</b> 5°C ÷ 25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> (temperature of the base material) 5°C ÷ 40°C</p> <p><b>- SERVICE TEMPERATURE:</b> (ambient temperature after full curing) -40°C ÷ +100°C</p> <p><b>- SKIN TIME:</b> 10-15 minuti</p> <p><b>- CURING RATE:</b> &gt; 3 mm/24 h</p>	<p>Good adhesion on:</p> <ul style="list-style-type: none"> <li>Metals (including cooper, zinc, lead)</li> <li>Stainless steel</li> <li>Anodized aluminium</li> <li>Hard plastic elements</li> <li>Glass</li> <li>Mirrors</li> <li>Wood</li> </ul> <p>Suitable for INSTANT bonding of baseboard, laminated panels, window sills, etc...</p> <p>Ideal for metalworks, shipbuilding and automotive industrie</p> <p>• NOT suitable for PP, PE, PTFE</p> <p>• NOT to be used for food grade applications</p> <p>• NOT to be used on glass and mirrors</p>	<ul style="list-style-type: none"> <li>High thickness of adhesive allowed: up to 20mm for joining irregular surfaces</li> <li>Environmentally friendly: free of solvent and isocyanate</li> <li>Immediately paintable (tests recommended)</li> </ul>

## DH

### Professional caulking gun for sealants and resins, with puncture wire

-  Pistolet professionnel pour silicones et résines
-  Professionelle Pistole für Dichtstoff und Harz
-  Pistola profesional manual para selladores y resinas
-  Профессиональный пистолет для герметиков и смол, с проводом







Item code	Suitable for foil bag of: ml	Pcs. per carton
DH 01 01 300	280 - 290 - 300 - 310	4

#### Description / Description / Beschreibung / Descripción / Описание

Professional metal caulking gun for sealant and resin cartridges (280-290-300-310 ml), black aluminium handle and black steel trigger with puncture wire.  
Mechanical ratio: 12:1  
Pitch: 7 mm

## WL

### Caulking gun for sealants with drop-save and puncture wire

-  Pistolet manuel pour silicones
-  Handpistole für Dichtstoffe
-  Pistola manual semi-profesional para selladores
-  Пистолет для герметика. Скелетный, усиленный. Противокапельная система, с проводом







Item code	Suitable for foil bag of: ml	Pcs. per carton
WL 01 00 300	280 - 290 - 300 - 310	6

#### Description / Description / Beschreibung / Descripción / Описание

Skeleton type metal caulking gun for cartridges (280-290-300-310 ml) with drop-save device, zinc alloy handle and metal trigger with puncture wire.  
Mechanical ratio: 7:1  
Pitch: 12 mm

## WM

### Professional caulking gun for sealants in foil bag

-  Pistolet professionnel pour silicones en poche alu
-  Professionelle Pistole für Dichtstoffe in Alu-Beutel
-  Pistola manual profesional para selladores en salchicha
-  Пистолет для выдавливания герметика в пакете из алюминиевой фольги



Item code	Suitable for foil bag of: ml	Pcs. per carton
WM 01 00 600	300 - 400 - 600	1

#### Description / Description / Beschreibung / Descripción / Описание

Professional caulking gun for foil bag (300-400-600 ml), aluminium handle and trigger, steel plunger rod and plastic funnel pull-handle, aluminium tubular sealant holder.  
Mechanical ratio: 12:1  
Pitch: 7 mm



# BAD

## PROFESSIONAL 360° swivel nozzle for sealant/adhesive cartridges, white colour

- Canule PROFESSIONNELLE spéciale tournante 360° pour cartouches silicone/colle mastic, blanc
- Spezielle drehbare 360° PROFI- Düse für Dicht- und Klebstoff Kartuschen, weiß
- Boquilla profesional articulable 360° para cartuchos de selladores y adhesivos, blanca
- Профессиональная поворотная насадка 360° для герметика / клей картриджей, белого цвета



Item code	Length (mm)	Suitable for cartridges of: ml	Pcs. per box	Pcs. per carton
BAD 00 00 110	110	280 - 290 - 300 - 310	30	300

Usage / Utilisation / Benutzung / Uso / Применение



360° swivel nozzle for sealing in difficult locations.

Box / Boîte / Verpackung / Caja / Упаковка



# ZK

## Extension for nozzle for sealant/adhesive cartridges, white colour

- Prolonge pour cartouches silicone/colle mastic, blanc
- Verlängerung für Dicht- und Klebstoff Kartuschen, weiß
- Prolonga para boquillas, blanca
- Удлинитель для насадки для герметика / клей картриджей, белого цвета



Item code	Length (mm)	Suitable for cartridges of: ml	Pcs. per box	Pcs. per carton
ZK 00 00 130	130	280 - 290 - 300 - 310	30	300

Box / Boîte / Verpackung / Caja / Упаковка



# ZU

## Nozzle with protection cap for sealant/adhesive cartridges, natural white colour

- Canule avec bouchon de protection pour cartouches silicone/colle mastic, blanc naturel
- Düse mit Schutzkappe für Dicht- und Klebstoff Kartuschen, weiß
- Boquilla para cartuchos de selladores y adhesivos, con tapón, blanca
- Насадка с защитным колпачком для герметика / клей картриджей, белого цвета



Item code	Length (mm)	Suitable for cartridges of: ml	Pcs. per box	Pcs. per carton
ZU 00 00 100	100	280 - 290 - 300 - 310	30	300

Box / Boîte / Verpackung / Caja / Упаковка



## ZO

### Standard nozzle for sealant/adhesive cartridges, natural white colour

- Canule standard pour cartouches silicone/colle mastic, blanc naturel
- Standarddüse für Dicht- und Klebstoff Kartuschen, weiß
- Boquilla estándar para cartuchos de selladores y adhesivos, blanca
- Стандартная насадка для герметика / клей картриджей, белого цвета



Item code	Length (mm)	Suitable for cartridges of: ml	Pcs. per box	Pz. imballo
ZO 00 00 110	110	280 - 290 - 300 - 310	24	240

Box / Boîte / Verpackung / Caja / Упаковка



## ZV

### Special nozzle for high viscosity sealant/adhesive cartridges, natural white colour

- Canule spéciale pour cartouches silicone/colle mastic haute viscosité, blanc naturel
- Spezielle Düse für Dicht- und Klebstoff Kartuschen mit hoher Viskosität, weiß
- Boquilla especial para cartuchos de selladores y adhesivos de alta viscosidad, blanca
- Специальная насадка для высокой вязкость герметика / клей картриджей, белого цвета



Item code	Length (mm)	Suitable for cartridges of: ml	Pcs. per box	Pcs. per carton
ZV 00 00 060	60	280 - 290 - 300 - 310	30	300

Box / Boîte / Verpackung / Caja / Упаковка



## ZW

### Nozzle for sealant/adhesive in aluminium foil bag, natural white colour






- Canule pour poche de silicone/colle mastic, blanc naturel
- Spezielle Düse für Dicht- und Klebstoff Beutel, weiß
- Boquilla para selladores y adhesivos en salchicha, blanca
- Насадка для герметика / клей в пакете из алюминиевой фольги, белого цвета



Item code	Length (mm)	Suitable for cartridges of: ml	Pcs. per box	Pcs. per carton
ZW 00 00 120	120	300 - 400 - 600	10	100

Box / Boîte / Verpackung / Caja / Упаковка




-  **One-component polyurethane foam, B3 fire resistance class, with plastic nozzle and disposable glove**
-  Mousse polyuréthane monocomposant, classe de résistance au feu B3, avec injecteur de plastique et gants jetables
-  Einzelkomponent-Polyurethanschaum, Feuerwiderstandsklasse B3, mit Einspritzdüse und Einweghandschuhe
-  Espuma de poliuretano monocomponente, clase B3 con resistencia al fuego, completo de boquilla de plástico y guantes desechables
-  Полиуритановая пена, класс пожаробезопасности В3 в комплекте с пластиковой насадкой и одноразовыми перчатками

**BR 02** in gun can / pour pistolet / für Handpistole / uso pistola / для пистолетного использования



Item code	Contents	Pcs. per carton	Pcs. per pallet
	ml		
BR 02 00 750	750	12	840

Usage / Utilisation / Benutzung / Uso / Применение

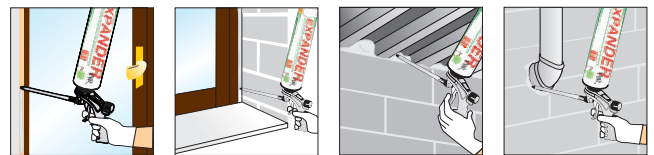


**BR 03** in manual can / à utilisation manuelle / Manuell / extrusión manual / для ручного использования



Item code	Contents	Pcs. per carton	Pcs. per pallet
	ml		
BR 03 00 750	750	12	840

Usage / Utilisation / Benutzung / Uso / Применение

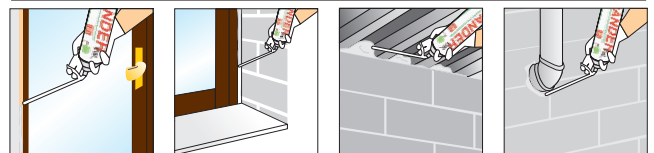

Technical Data Sheet



Description	Usage	Advantages
<p><b>BR EXPANDER PUR</b> is a One-Component polyurethane foam suitable for installing and sealing frames, insulation panels (polystyrene, polyurethane) and for fillings and soundproofings. Single use gloves included.</p> <p><b>BR02</b> Gun can, to be used with Professional gun (Tecfi Item code BS01).</p> <p><b>BR03</b> Manual can with stroke.</p> <p><b>- STORAGE:</b> +5°C ÷ +25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> +5°C ÷ +30°C</p> <p><b>- SKIN TIME:</b> 10 minutes</p> <p><b>- CAN BE CUTTED AFTER:</b> 20-25 minutes</p> <p><b>- YELD:</b> max 47 L</p> <p><b>- ACOUSTIC INSULATION:</b> 58 dB</p>	<p>High adhesion on all building materials as:</p> <ul style="list-style-type: none"> <li>• Wood</li> <li>• Concrete</li> <li>• Bricks</li> <li>• Could also be used on some non-porous surfaces as aluminium, metals and plastic materials (except PE, PP, PTFE, silicone).</li> <li>• NOT suitable for PP, PE, PTFE</li> <li>• NOT suitable for silicone</li> <li>• NOT to be used for food grade applications</li> <li>• NOT to be used under water</li> </ul>	<ul style="list-style-type: none"> <li>• High adhesion</li> <li>• B3 Fire reaction</li> <li>• Effective Acousting insulation</li> <li>• Can be painted or covered with plaster</li> <li>• Ideal for filling big gaps</li> <li>• Paintable (tests recommended) once dry</li> </ul>

**One-component polyurethane foam for roofing, B3 fire resistance class, with plastic nozzle and safety gloves**


- Mousse polyuréthane monocomposant, pour couvertures, classe de résistance au feu B3, avec injecteur de plastique et gants jetables
- Einzelkomponent-Polyurethanschaum für Dächer, Feuerwiderstandsklasse B3, mit Einspritzdüse und Einweghandschuhe
- Espuma de poliuretano monocomponente para techos, clase B3 con resistencia al fuego, completo de boquilla de plástico y guantes desechables
- Однокомпонентная полиуритановая пена для кровлей, класс пожаробезопасности B3 в комплекте одноразовыми перчатками

**BRC 02** in gun can / pour pistolet / für Handpistole / uso pistola / для пистолетного использования



Item code	Contents ml	Pcs. per carton	Pcs. per pallet
BRC 02 00 750	750	12	840

Usage / Utilisation / Benutzung / Uso / Применение




**BRC 03** in manual can / à utilisation manuelle / Manuell / extrusión manual / для ручного использования



Item code	Contents ml	Pcs. per carton	Pcs. per pallet
BRC 03 00 750	750	12	840

Usage / Utilisation / Benutzung / Uso / Применение




Description	Usage	Advantages
<p><b>BRC EXPANDER PUR</b> is a One-Component polyurethane foam suitable for fixing and sealing roof tiles and further lightweight elements in wall and roof. Also suitable for installing and sealing metal sheets, frames, insulation panels (polystyrene, polyurethane) and for fillings and soundproofings.</p> <p>The special low expansion and high adhesion formulation put BRC as first choice in all application where gap filling capacity and good adhesion performances are required.</p> <p><b>BRC02</b> Gun can, to be used with Professional gun (Tecfi Item code BS01)</p> <p><b>BRC03</b> Manual can with stroke</p> <p><b>- STORAGE:</b> +5°C ÷ +25°C, keep away from direct sunlight</p> <p><b>- INSTALLATION TEMPERATURE:</b> +5°C ÷ +30°C</p> <p><b>- SKIN TIME:</b> 5-10 minutes</p> <p><b>- CAN BE CUTTED AFTER:</b> 20-25 minutes</p> <p><b>- YELD:</b> 60 ÷ 80 linear meter (7 ÷ 10 m<sup>2</sup>)</p> <p><b>- ACOUSTIC INSULATION:</b> 58 dB</p>	<p>High adhesion on all building materials as:</p> <ul style="list-style-type: none"> <li>• Wood</li> <li>• Concrete</li> <li>• Bricks</li> <li>• Could also be used on some non-porous surfaces as aluminium, metals and plastic materials (except PE, PP, PTFE, silicone).</li> </ul> <ul style="list-style-type: none"> <li>• NOT suitable for PP, PE, PTFE</li> <li>• NOT suitable for silicone</li> <li>• NOT to be used for food grade applications</li> <li>• NOT to be used under water</li> </ul>	<ul style="list-style-type: none"> <li>• High yielding</li> <li>• B3 Fire reaction</li> <li>• Low expansion, do not lift tiles</li> <li>• Effective Acousting insulation</li> <li>• Can be painted or covered with plaster</li> <li>• Ideal for filling big gaps</li> <li>• Paintable (tests recommended) once dry</li> </ul>




# BRR 01

**EXPANDER**<sup>PUR</sup>

- 🇬🇧 **EXPANDER PUR-EI - One-component polyurethane foam FIRE RESISTANT - max class EI 240 (EN 13501-2), with safety gloves**
- 🇫🇷 EXPANDER PUR-EI - Mousse polyuréthane monocomposant, résistante au feu - max EI 240 (EN13501-2), avec gants jetables
- 🇩🇪 EXPANDER PUR-EI - Einzelkomponent-Polyurethanschaum Brandschutzgeprüft - max EI 240 (EN13501-2), mit Einweghandschuhe
- 🇪🇸 EXPANDER PUR-EI - Espuma de poliuretano monocomponente RESISTENTE AL FUEGO - max EI 240 (EN 13501-2), con guantes desechables
- 🇷🇺 EXPANDER PUR-EI - Огнестойкая однокомпонентная полиуретановая пена - до EI 240 (EN13501-2), в комплекте с одноразовыми перчатками

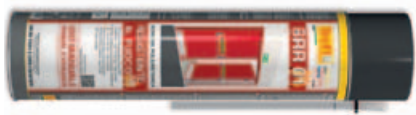

Item code	Contents ml	Pcs. per carton	Pcs. per pallet
BRR 01 00 750	750	12	840

Description	Usage	Advantages
<p>EXPANDER PUR-EI is a one component, fire resistant, polyurethane foam EI 240 classified according to EN 13501-2:2009.</p> <p>Plastic nozzle and disposable gloves included.</p> <p>- <b>STORAGE:</b> +5°C ÷ +30°C, keep away from direct sunlight</p> <p>- <b>INSTALLATION TEMPERATURE:</b> +5°C ÷ +30°C</p> <p>- <b>SKIN TIME:</b> 6-10 minutes</p> <p>- <b>CAN BE CUTTED AFTER:</b> 30 minutes</p> <p>- <b>YELD:</b> 40 liters</p>	<p>BRR is suitable for insulating and sealing gaps between walls, windows and frames, doors, pipes and electrical installations. The special formulation provides excellent adhesion on:</p> <ul style="list-style-type: none"> <li>• Wood</li> <li>• Concrete</li> <li>• Brick</li> <li>• Metals</li> <li>• Glass</li> <li>• Fiber cement</li> <li>• Most plastic materials (Except PE, PP, PTFE).</li> </ul> <p>For the installation of doors and window frames, mechanical connectors and struts are required.</p>	<ul style="list-style-type: none"> <li>• HIGH FIRE RESISTANCE, classified up to EI 240 according to EN13501-2:2009</li> <li>• Classification report n° CSI1978FR</li> <li>• Paintable (tests recommended) once dry.</li> <li>• Good resistance to water, detergents, and micro-organisms.</li> </ul> <div style="display: flex; align-items: center;"> <div style="margin-right: 10px;"> <p>Technical Data Sheet</p>  </div>  </div> <div style="margin-top: 10px;"> <p>Fire test report</p>  </div>

# BS 01

- 🇬🇧 **Professional gun for polyurethane foam**
- 🇫🇷 Pistolet professionnel pour mousse polyuréthane
- 🇩🇪 Professionelle Handpistole für Polyurethanschaum
- 🇪🇸 Pistola profesional para espuma de poliuretano
- 🇷🇺 Профессиональный пистолет для полиуритановой пены



Item code	Contents ml	Pcs. per carton
BS 01 00 000	1	10

# BRP 01

- 🇬🇧 **Professional Gun Cleaner for Polyurethane Foams**
- 🇫🇷 Nettoyant professionnel pour pistolet de mousse polyuréthane (art. BS 01)
- 🇩🇪 Reiniger für Polyurethanschaum- Pistole (Art.BS 01)
- 🇪🇸 Limpiador profesional para pistolas (código BS 01)
- 🇷🇺 Профессиональный очиститель для пистолетов (код BS 01)



Item code	Contents ml	Pcs. per carton	Pcs. per pallet
BRP 01 00 500	500	12	840

Description	Usage	Advantages
<p>PROFESSIONAL cleaner (solvent) for PU foam guns (Tecfi item code BS 01). To remove uncured foams, CFC Free.</p> <p>- <b>STORAGE:</b> +5°C ÷ +25°C, keep away from direct sunlight</p>	<p>Suitable to clean gun strokes and gun adaptor.</p> <p>Not suitable for sensitive surfaces like paint and coloured surfaces, sintetic material and textiles.</p>	<p>Remove residual of uncured foam and prevent gun jamming</p> <p>Universal, suitable for all guns</p>

