



YTR 01 Inserto filettato con testa cilindrica ridotta, corpo cilindrico aperto zigrinato, in acciaio zincato



SCHEDA TECNICA

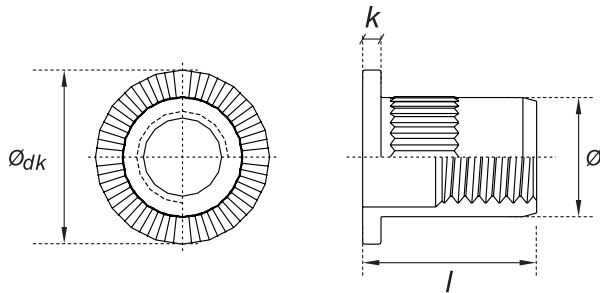

l	lunghezza
\varnothing	diametro foro
k	spessore testa
\varnothing_{dk}	diametro testa
T_{fix}	spessore serrabile
s	spessore supporto
N	Resistenza caratteristica all'estrazione

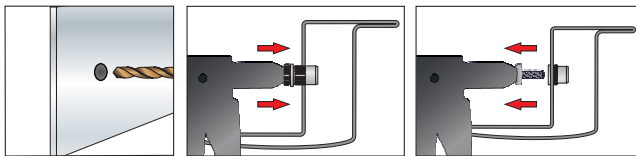


SCHEDA TECNICA **YTR 01**

Codice Articolo	Misura <i>M x l (mm)</i>	\varnothing (foro) (mm)	\varnothing_{dk} (mm)	k (mm)	T_{fix} min - max (mm)	s (mm)	N (kN)
YTR 01 12 020	M12 x 20	15	19	1,8	1 - 3,5	1,0	7,5
						1,5	9,0
						3,5	25,0


YTR 01 Knurled open cylindrical shank steel rivet nut with reduced Dome Head, zinc plated



TECHNICAL DATA SHEET

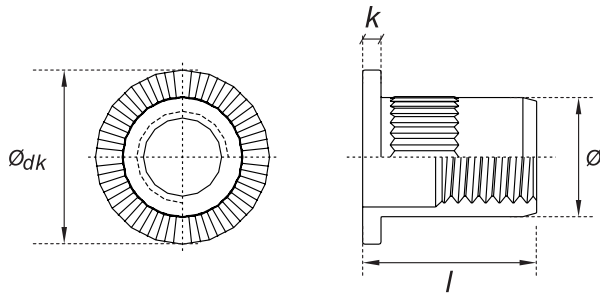

l	length
\varnothing	hole diameter
k	head thickness
\varnothing_{dk}	head diameter
T_{fix}	thickness of fixture
s	thickness of the member
N	Characteristic tensile resistance

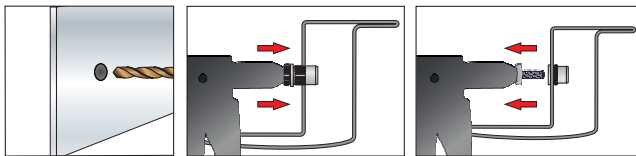

TECHNICAL DATA SHEET OF **YTR 01**

Item Code	Size <i>M x l (mm)</i>	\varnothing (hole) <i>(mm)</i>	\varnothing_{dk} <i>(mm)</i>	k <i>(mm)</i>	T_{fix} <i>min - max (mm)</i>	s <i>(mm)</i>	N <i>(kN)</i>
YTR 01 12 020	M12 x 20	15	19	1,8	1 - 3,5	1,0	7,5
						1,5	9,0
						3,5	25,0