


AAC Vite a legno Testa Piana Svasata, in acciaio zincato



SCHEDA TECNICA

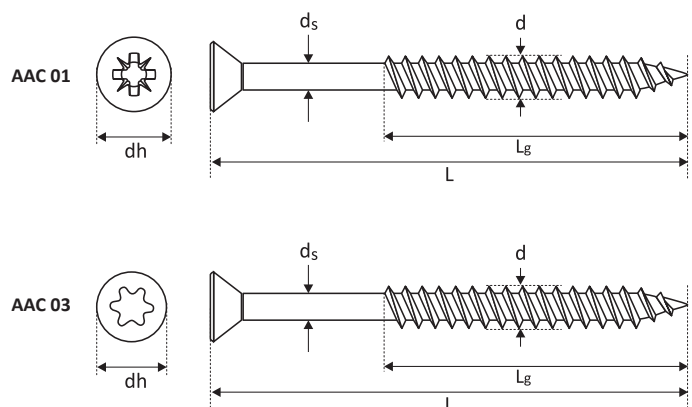

| | |
|----------------------|---------------------------------|
| dh | diametro testa |
| L | lunghezza vite |
| Lg | lunghezza della parte filettata |
| d | diametro nominale |
| d₁ | diametro del filo |
| d_s | diametro del cuore |
| T | Impronta |
| Mt | coppia torcente |
| N | carico a trazione |

Informazioni aggiuntive

Materiale: Acciaio al carbonio

Finitura: Zincata

Rivestimento: Elettrozincatura secondo ISO 2081, classe di servizio 2 (EN 1995-1-1)

SCHEDA TECNICA **AAC**


| Codice Articolo | Ø x L (mm) | L _g (mm) | d _h (mm) | d ₁ (mm) | d _s (mm) | 7,50 | M _t (Nm) | N (kN) |
|-----------------|---------------|------------------------|------------------------|------------------------|------------------------|------------------------------|------------------------|-----------|
| Ø 4 | | | | | | | | |
| AAC 01 40 045 | 4 x 45 | 30 | 7,50 | 2,90 | 3,80 | PZ2 | 3 | 4 |
| AAC 01 40 065 | 4 x 65 | 39 | | | | | | |
| AAC 01 40 085 | 4 x 85 | 51 | | | | | | |
| Ø 5,5 | | | | | | | | |
| AAC XX 55 065 | 5,5 x 65 | 39 | 11 | 4 | 5,30 | PZ3 (AAC 01) T30 (AAC 03) | 7 | 8 |
| AAC XX 55 085 | 5,5 x 85 | 51 | | | | | | |
| AAC XX 55 105 | 5,5 x 105 | 63 | | | | | | |
| AAC XX 55 125 | 5,5 x 125 | 75 | | | | | | |
| AAC XX 55 140 | 5,5 x 140 | 84 | | | | | | |
| Ø 7 | | | | | | | | |
| AAC XX 70 085 | 7 x 85 | 51 | 13,50 | 5,60 | 6,80 | PZ4 (AAC 01) T40 (AAC 03) | 16 | 14 |
| AAC XX 70 105 | 7 x 105 | 63 | | | | | | |
| AAC XX 70 120 | 7 x 120 | 72 | | | | | | |
| AAC XX 70 140 | 7 x 140 | 84 | | | | | | |
| AAC XX 70 165 | 7 x 165 | 99 | | | | | | |
| AAC XX 70 205 | 7 x 205 | 99 | | | | | | |

AAC XX = AAC01/AAC03

AAC Flat countersunk head wood screw, zinc plated



TECHNICAL DATA SHEET

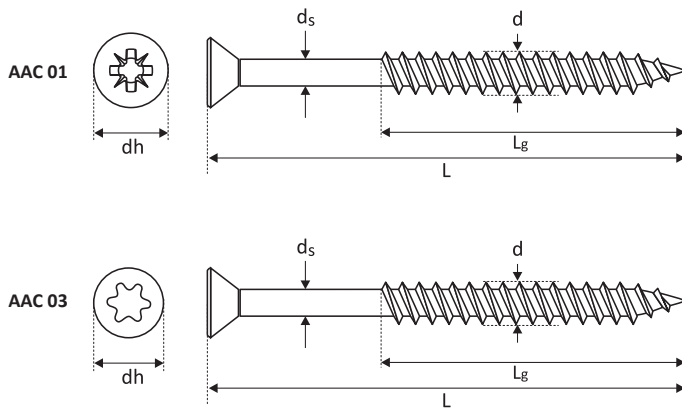

| | |
|----------------------|--------------------------------------|
| dh | head diameter |
| L | overall screw length |
| Lg | threaded length |
| d | nominal diameter |
| d₁ | thread diameter |
| d_s | core diameter |
| T | Recess |
| M_t | Breaking torque moment |
| N | Characteristic breaking tensile load |

Additional information

Material: Zinc plated carbon Steel

Coating: Zinc plated

Electro-galvanizing according to ISO 2081, service class 2 (EN 1995-1-1)

TECHNICAL DATA OF AAC

| Item Code | Ø x L (mm) | L _g (mm) | d _h (mm) | d ₁ (mm) | d _s (mm) | T | M _t (Nm) | N (kN) |
|---------------|---------------|------------------------|------------------------|------------------------|------------------------|------------------------------|------------------------|-----------|
| Ø 4 | | | | | | | | |
| AAC 01 40 045 | 4 x 45 | 30 | 7,50 | 2,90 | 3,80 | PZ2 | 3 | 4 |
| AAC 01 40 065 | 4 x 65 | 39 | | | | | | |
| AAC 01 40 085 | 4 x 85 | 51 | | | | | | |
| Ø 5,5 | | | | | | | | |
| AAC XX 55 065 | 5,5 x 65 | 39 | 11 | 4 | 5,30 | PZ3 (AAC 01) T30 (AAC 03) | 7 | 8 |
| AAC XX 55 085 | 5,5 x 85 | 51 | | | | | | |
| AAC XX 55 105 | 5,5 x 105 | 63 | | | | | | |
| AAC XX 55 125 | 5,5 x 125 | 75 | | | | | | |
| AAC XX 55 140 | 5,5 x 140 | 84 | | | | | | |
| Ø 7 | | | | | | | | |
| AAC XX 70 085 | 7 x 85 | 51 | 13,50 | 5,60 | 6,80 | PZ4 (AAC 01) T40 (AAC 03) | 16 | 14 |
| AAC XX 70 105 | 7 x 105 | 63 | | | | | | |
| AAC XX 70 120 | 7 x 120 | 72 | | | | | | |
| AAC XX 70 140 | 7 x 140 | 84 | | | | | | |
| AAC XX 70 165 | 7 x 165 | 99 | | | | | | |
| AAC XX 70 205 | 7 x 205 | 99 | | | | | | |

AAC XX = AAC01/AAC03