



BJ 06 - BJ 26 - BJ 46 Ancora a scatto, in acciaio zincato, con occhiolo aperto, dado e rondella




 **SCHEDA TECNICA**

d₀	diametro foro
L	lunghezza vite
M	diametro vite
L₁	lunghezza filettatura vite
N_k	Carico caratteristico a estrazione

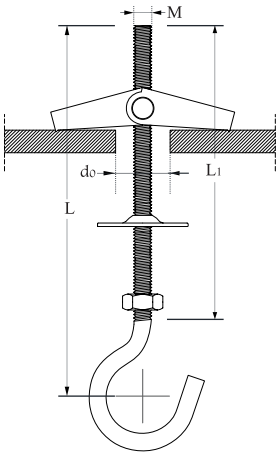


BJ 06 - BJ 26

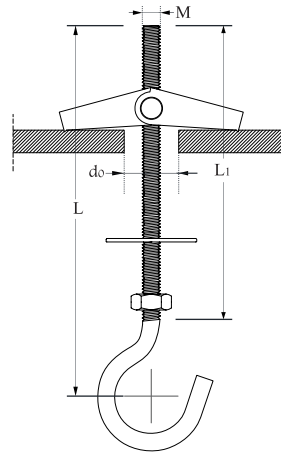

BJ 46


DATI TECNICI PER APPLICAZIONI SU LATERIZIO

Codice Articolo	Misura Vite M x L (mm)	d ₀ (mm)
con occhiolo aperto, dado e rondella		
BJ 26 04 070	M4 x 70	12
BJ 06 04 070	M4 x 70	14
BJ 06 05 070	M5 x 70	14
BJ 46 06 075	M6 x 75	18


LATERIZIO	M (mm)	L (mm)	d ₀ (mm)	N _k (kN)
	4	70	12	0,60
	4	70	14	0,60
	5	70	14	0,76
	6	75	18	1,23

BJ 06 - BJ 26 - BJ 46


Steel toggle anchor with spring, nut and washer, zinc plated, with hook screw



TECHNICAL DATA SHEET

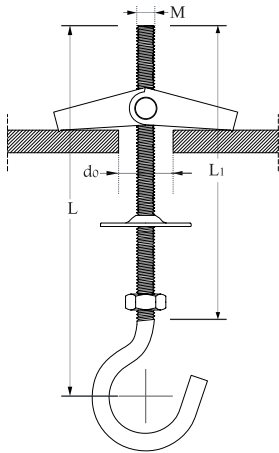

BJ 06 - BJ 26

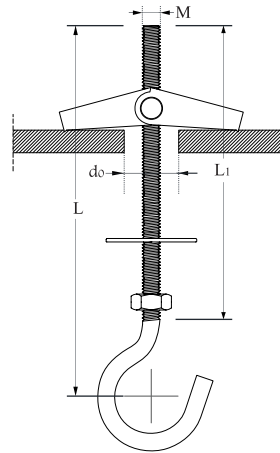

BJ 46

d₀	drill hole diameter
L	screw length
M	screw diameter
L₁	Thread length
N_k	Characteristic resistance to tension load

TECHNICAL DATA FOR USE ON BRICK

Item Code	Screw size M x L (mm)	d ₀ (mm)
with hook screw, nut and washer		
BJ 26 04 070	M4 x 70	12
BJ 06 04 070	M4 x 70	14
BJ 06 05 070	M5 x 70	14
BJ 46 06 075	M6 x 75	18

BRICK	M (mm)	L (mm)	d ₀ (mm)	N _k (kN)
	4	70	12	0,60
	4	70	14	0,60
	5	70	14	0,76
	6	75	18	1,23