


GF 05 Vite metrica speciale in acciaio bonificato con gancio a doppia curva per funi, cavi e reti



SCHEDA TECNICA

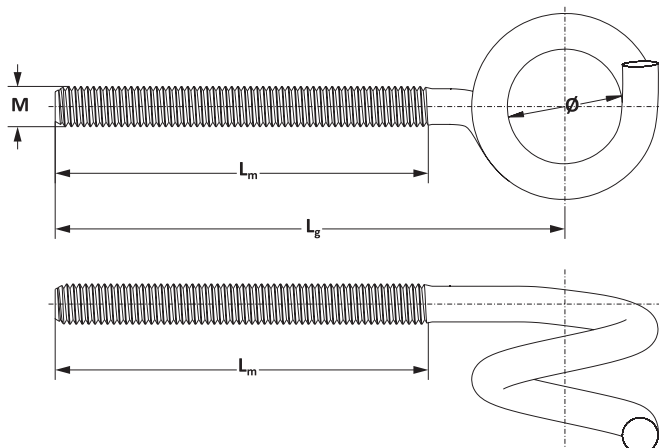

$\varnothing \times L$	diametro esterno ancorante x lunghezza ancorante
L_g	lunghezza fino al centro dell'occhiolo
\varnothing_i	interno occhiolo
N_{rk}	carico caratteristico rottura acciaio
L_m	lunghezza parte metrica


DATI TECNICI E RISULTATI DI PROVA SU ANCORANTI GF05 IN CALCESTRUZZO NON FESSURATO C20/25

Codice Articolo	Misura Ancorante $M \times L_g(mm)$	L_m (mm)	\varnothing_i (mm)	N_{rk} (kN)
GF 05 08 120	M8 x 120	86	17,5	30
GF 05 10 110	M10 x 110	76	17,5	50
GF 05 12 125	M12 x 125	86	25	70

GF 05 Special double curved hook machine screw for anti-falling safety ropes



TECHNICAL DATA SHEET

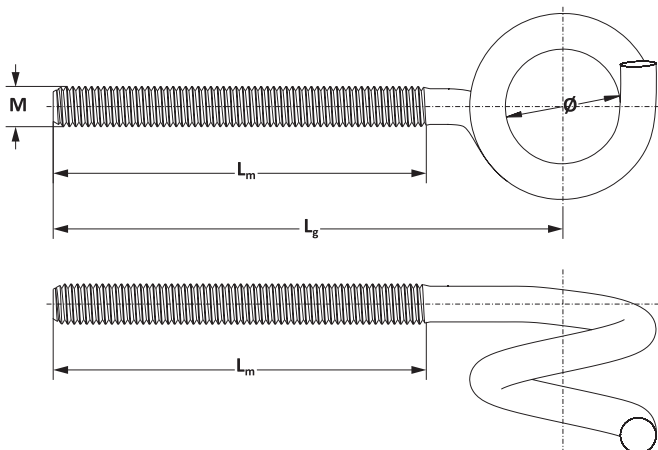

$\varnothing \times L$ anchor diameter x anchor length

L_g length at the eyelet

\varnothing_i internal eyebolt diameter

N_{rk} characteristics pull-out load

L_m metric part length

TECHNICAL DATA AND TEST REPORT OF GF 05 ANCHORS IN NON-CRACKED CONCRETE C20/25

Item Code	Anchor Size $M \times L_g(\text{mm})$	L_m (mm)	\varnothing_i (mm)	N_{rk} (kN)
GF 05 08 120	M8 x 120	86	17,5	30
GF 05 10 110	M10 x 110	76	17,5	50
GF 05 12 125	M12 x 125	86	25	70