



## HE 01 Tassello ad elica autop perforante in lega di zinco, per cartongesso

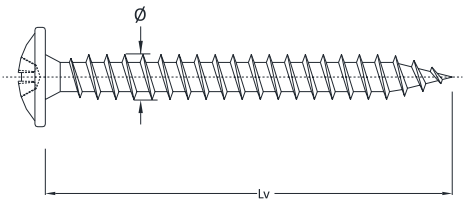


### SCHEDA TECNICA

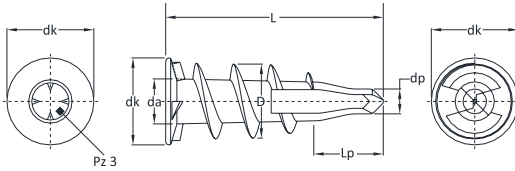

|                          |   |
|--------------------------|---|
| $d_k \times L$           | Diametro della testa del tassello x Lunghezza del tassello        |
| $\varnothing \times L_v$ | Diametro della vite x Lunghezza della vite                        |
| $d_a$                    | Diametro del raccordo sotto testa                                 |
| $d_p$                    | Diametro della punta autopforante                                 |
| $L_p$                    | Lunghezza dell'elemento punta della vite                          |
| $D$                      | Diametro tassello   |
| $F_{r,k}$                | Resistenza caratteristica indipendente dalla direzione del carico |

### Informazioni per l'installazione

Reazione al fuoco: **Classe A1**  
secondo 96/603/CE, modificata da 2000/605/CE

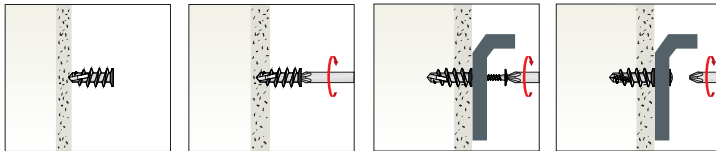



### DATI TECNICI E RISULTATI DI PROVA SU TASSELLI HE 01

| Codice Articolo     | Misura Tassello<br>$d_k \times L$ (mm) | Misura Vite<br>$\varnothing \times l_v$ (mm) | Impronta Vite<br>PZ | $d_a$<br>(mm) | $d_p$<br>(mm) | $L_p$<br>(mm) | $D$<br>(mm) | CARICO CARATTERISTICO<br>$F_{r,k}$<br>(kN) |
|---------------------|--|--|---------------------|---------------|---------------|---------------|-------------|--|
| <b>HE 01 13 034</b> | 14 x 34                                | 4,5 x 50                                     | 2                   | 7             | 4             | 10,5          | 12          | <b>0,11</b>                                |
| <b>HE 01 15 029</b> | 14 x 29                                | 5 x 40                                       | 3                   | 8             | 6,2           | 7             | 12,5        | <b>0,11</b>                                |

**HE 01** Zinc alloy self drilling speed drive anchor, to be used on drywall




TECHNICAL DATA SHEET

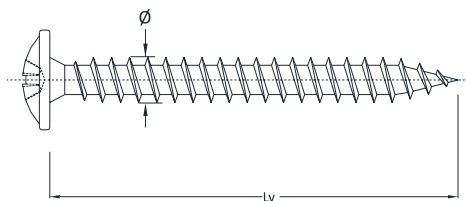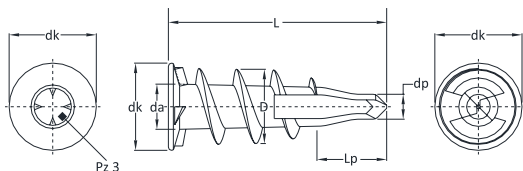

|                          |  |
|--------------------------|--|
| $d_k \times L$           | Head Diameter x Fastener length  |
| $\varnothing \times L_v$ | Threaded diameter x Screw length   |
| $d_a$                    | Maximum transition diameter under the head                                 |
| $d_p$                    | Diameter of the tip  |
| $L_p$                    | Length of the tip  |
| $D$                      | Fastener diameter  |
| $F_{r,k}$                | Characteristic resistance of the fastener regardless of the load direction |

**Installation information**

Reaction to fire: **Class A1**  
according to 96/603/EC, as amended by 200/605/EC

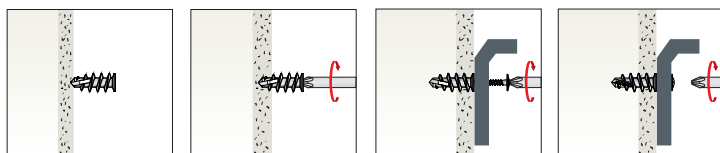

TECHNICAL DATA AND TEST REPORT OF HE 01 ANCHORS

| Item Code           | Anchor Size<br>$d_k \times L$ (mm) | Screw Size<br>$\varnothing \times l_v$ (mm) | Recess screw<br>PZ | $d_a$<br>(mm) | $d_p$<br>(mm) | $L_p$<br>(mm) | $D$<br>(mm) | CHARACTERISTIC LOADS<br>$F_{r,k}$<br>(kN) |
|---------------------|------------------------------------|---|--------------------|---------------|---------------|---------------|-------------|---|
| <b>HE 01 13 034</b> | 14 x 34                            | 4,5 x 50                                    | 2                  | 7             | 4             | 10,5          | 12          | <b>0,11</b>                               |
| <b>HE 01 15 029</b> | 14 x 29                            | 5 x 40                                      | 3                  | 8             | 6,2           | 7             | 12,5        | <b>0,11</b>                               |