



KLF 04 Vite Testa Esagonale con falsa Rondella, autoperforante, con filetto per legno e alette, assemblata con rondella ad ombrello EPDM/INOX



SCHEDA TECNICA

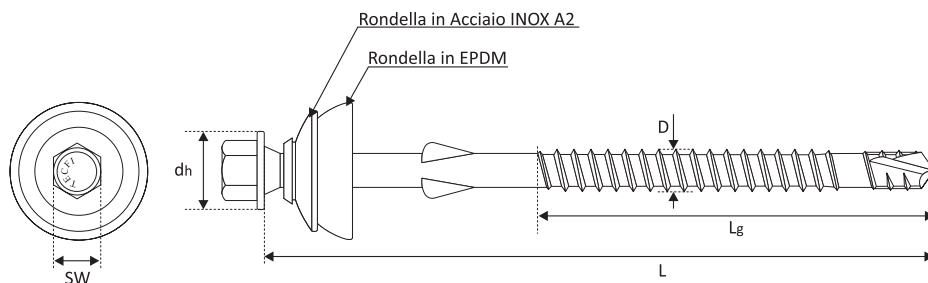

D	diámetro esterno della vite
L	lunghezza della vite
s	lunghezza della punta
Lg	lunghezza della parte filettata più la punta
M_T	momento di rottura a torsione
N_k	carico caratteristico di rottura a trazione
V_k	carico caratteristico di rottura a taglio
SW	Misura chiave
dh	diámetro testa



Informazioni per l'installazione

Massima capacità di foratura: 6 mm

Velocità di foratura massima: 1000÷1800 [rpm]


SCHEDA TECNICA KLF 04

Codice Articolo	D (mm)	L (mm)	sw (mm)	Lg (mm)	dh (mm)	M _t (Nm)	N _k (kN)	V _k (kN)
Ø 6,5								
KLF 04 65 105	6,5	105	8	60	13	16,9	17,70	6
KLF 04 65 115		115						
KLF 04 65 125		125						


KLF 04 Hexagonal flat washer head self drilling screw with chipboard thread and with wings on body, hardened, zinc plated, assembled with A2 (AISI 304) stainless steel washer/EPDM umbrella gasket



TECHNICAL DATA SHEET

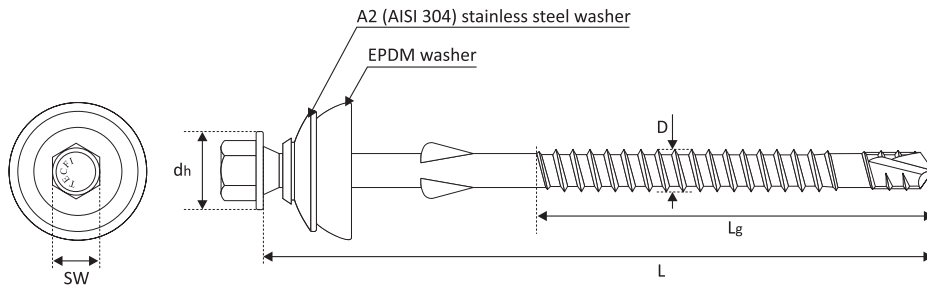

D	outside screw diameter
L	overall screw length
s	bit length
L_g	threaded plus bit length
M_t	breaking torque moment
N_k	characteristic breaking tensile load
V_k	characteristic breaking shear load
SW	wrench size
d_h	head diameter



Installation information

Maximum drilling capacity: 6 mm

Drilling speed: 1000÷1800 [rpm]

TECHNICAL DATA OF KLF 04

Item Code	D (mm)	L (mm)	sw (mm)	L _g (mm)	d _h (mm)	M _t (Nm)	N _k (kN)	V _k (kN)
Ø 6,5								
KLF 04 65 105	6,5	105	8	60	13	16,9	17,70	6
KLF 04 65 115		115						
KLF 04 65 125		125						